
青春スキャンダル / MY HERO

COIN/CREDIT OPTIONS SWITCH SETTING

DIP SWITCH #A


OPTION	1	2	3	4	5	6	7	8
1 COIN 1 CREDIT	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1 COIN 2 CREDITS	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
1 COIN 3 CREDITS	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
1 COIN 4 CREDITS	ON	ON	OFF	OFF	ON	ON	OFF	OFF
1 COIN 5 CREDITS	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
1 COIN 6 CREDITS	ON	OFF	ON	OFF	ON	OFF	ON	OFF
2 COINS 1 CREDIT	OFF	ON	ON	OFF	OFF	ON	ON	OFF
3 COINS 1 CREDIT	ON	ON	ON	OFF	ON	ON	ON	OFF
4 COINS 1 CREDIT	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON
2 COINS 3 CREDITS	ON	OFF	OFF	ON	ON	OFF	OFF	ON
2 COINS 1 CREDIT 4 COINS 2 CREDITS 5 COINS 3 CREDITS 6 COINS 4 CREDITS	OFF	ON	OFF	ON	OFF	ON	OFF	ON
2 COINS 1 CREDIT 4 COINS 2 CREDITS	ON	ON	OFF	ON	ON	ON	OFF	ON
1 COIN 1 CREDIT 2 COINS 2 CREDITS 3 COINS 3 CREDITS 4 COINS 4 CREDITS 5 COINS 6 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON
1 COIN 1 CREDIT 2 COINS 2 CREDITS 3 COINS 3 CREDITS 4 COINS 5 CREDITS	ON	OFF	ON	ON	ON	OFF	ON	ON
1 COIN 1 CREDIT 2 COINS 3 CREDITS	OFF	ON	ON	ON	OFF	ON	ON	ON
	COIN SWITCH #1				COIN SWITCH #2			




BARE BD No.
171−5034
171−5054
171−5054−01

44 PIN P=3.96mm

COMPONENT SIDE	Pin	Pin	SOLDER SIDE
GND	22	Z	GND
BLUE	21	Y	CMP SYNC
RED	20	X	GREEN
SPEAKER	19	W	SPEAKER
SERVICE SW.	18	V	NOT USED
TEST SW.	17	U	NOT USED
COIN SW 2	16	T	2P START
COIN SW 1	15	S	1P START
1P LEFT	14	R	2P LEFT
1P RIGHT	13	P	2P RIGHT
1P UP	12	N	2P UP
1P DOWN	11	M	2P DOWN
NOT USED	10	L	NOT USED
1P JUMP	9	K	2P JUMP
1P ATTACK	8	J	2P ATTACK
NOT USED	7	H	NOT USED
+12V	6	F	NOT USED
COIN METER 1	5	E	COIN METER 2
+ 5V	4	D	+ 5V
+ 5V	3	C	+ 5V
GND	2	B	GND
GND	1	A	GND



BARE BD No.
171−5054−02
171−5054−03

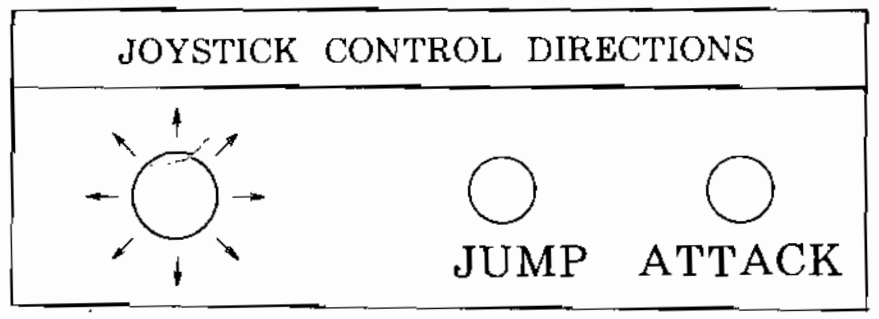


OPTION SWITCH SETTING

DIP SWITCH #B

OPTION		1	2	3	4	5	6	7	8
TABLE		OFF							ON
UPRIGHT		ON							
ADVERTISE SOUND	OFF		OFF						
	ON		ON						
NUMBER OF PLAYERS	3 MEN			OFF	OFF				
	4 MEN			ON	OFF				
	5 MEN			OFF	ON				
	FREE			ON	ON				
SCORE OF ADDITIONAL PLAYER	30000					OFF	OFF		
	50000					ON	OFF		
	70000					OFF	ON		
	90000					ON	ON		
GAME DIFFICULTY	EASY							OFF	
	HARD							ON	

SUPPLY VOLTAGES & CURRENT	
VOLTAGE	CURRENT
DC5V	4.1A
DC12V	0.25 A

421−6113

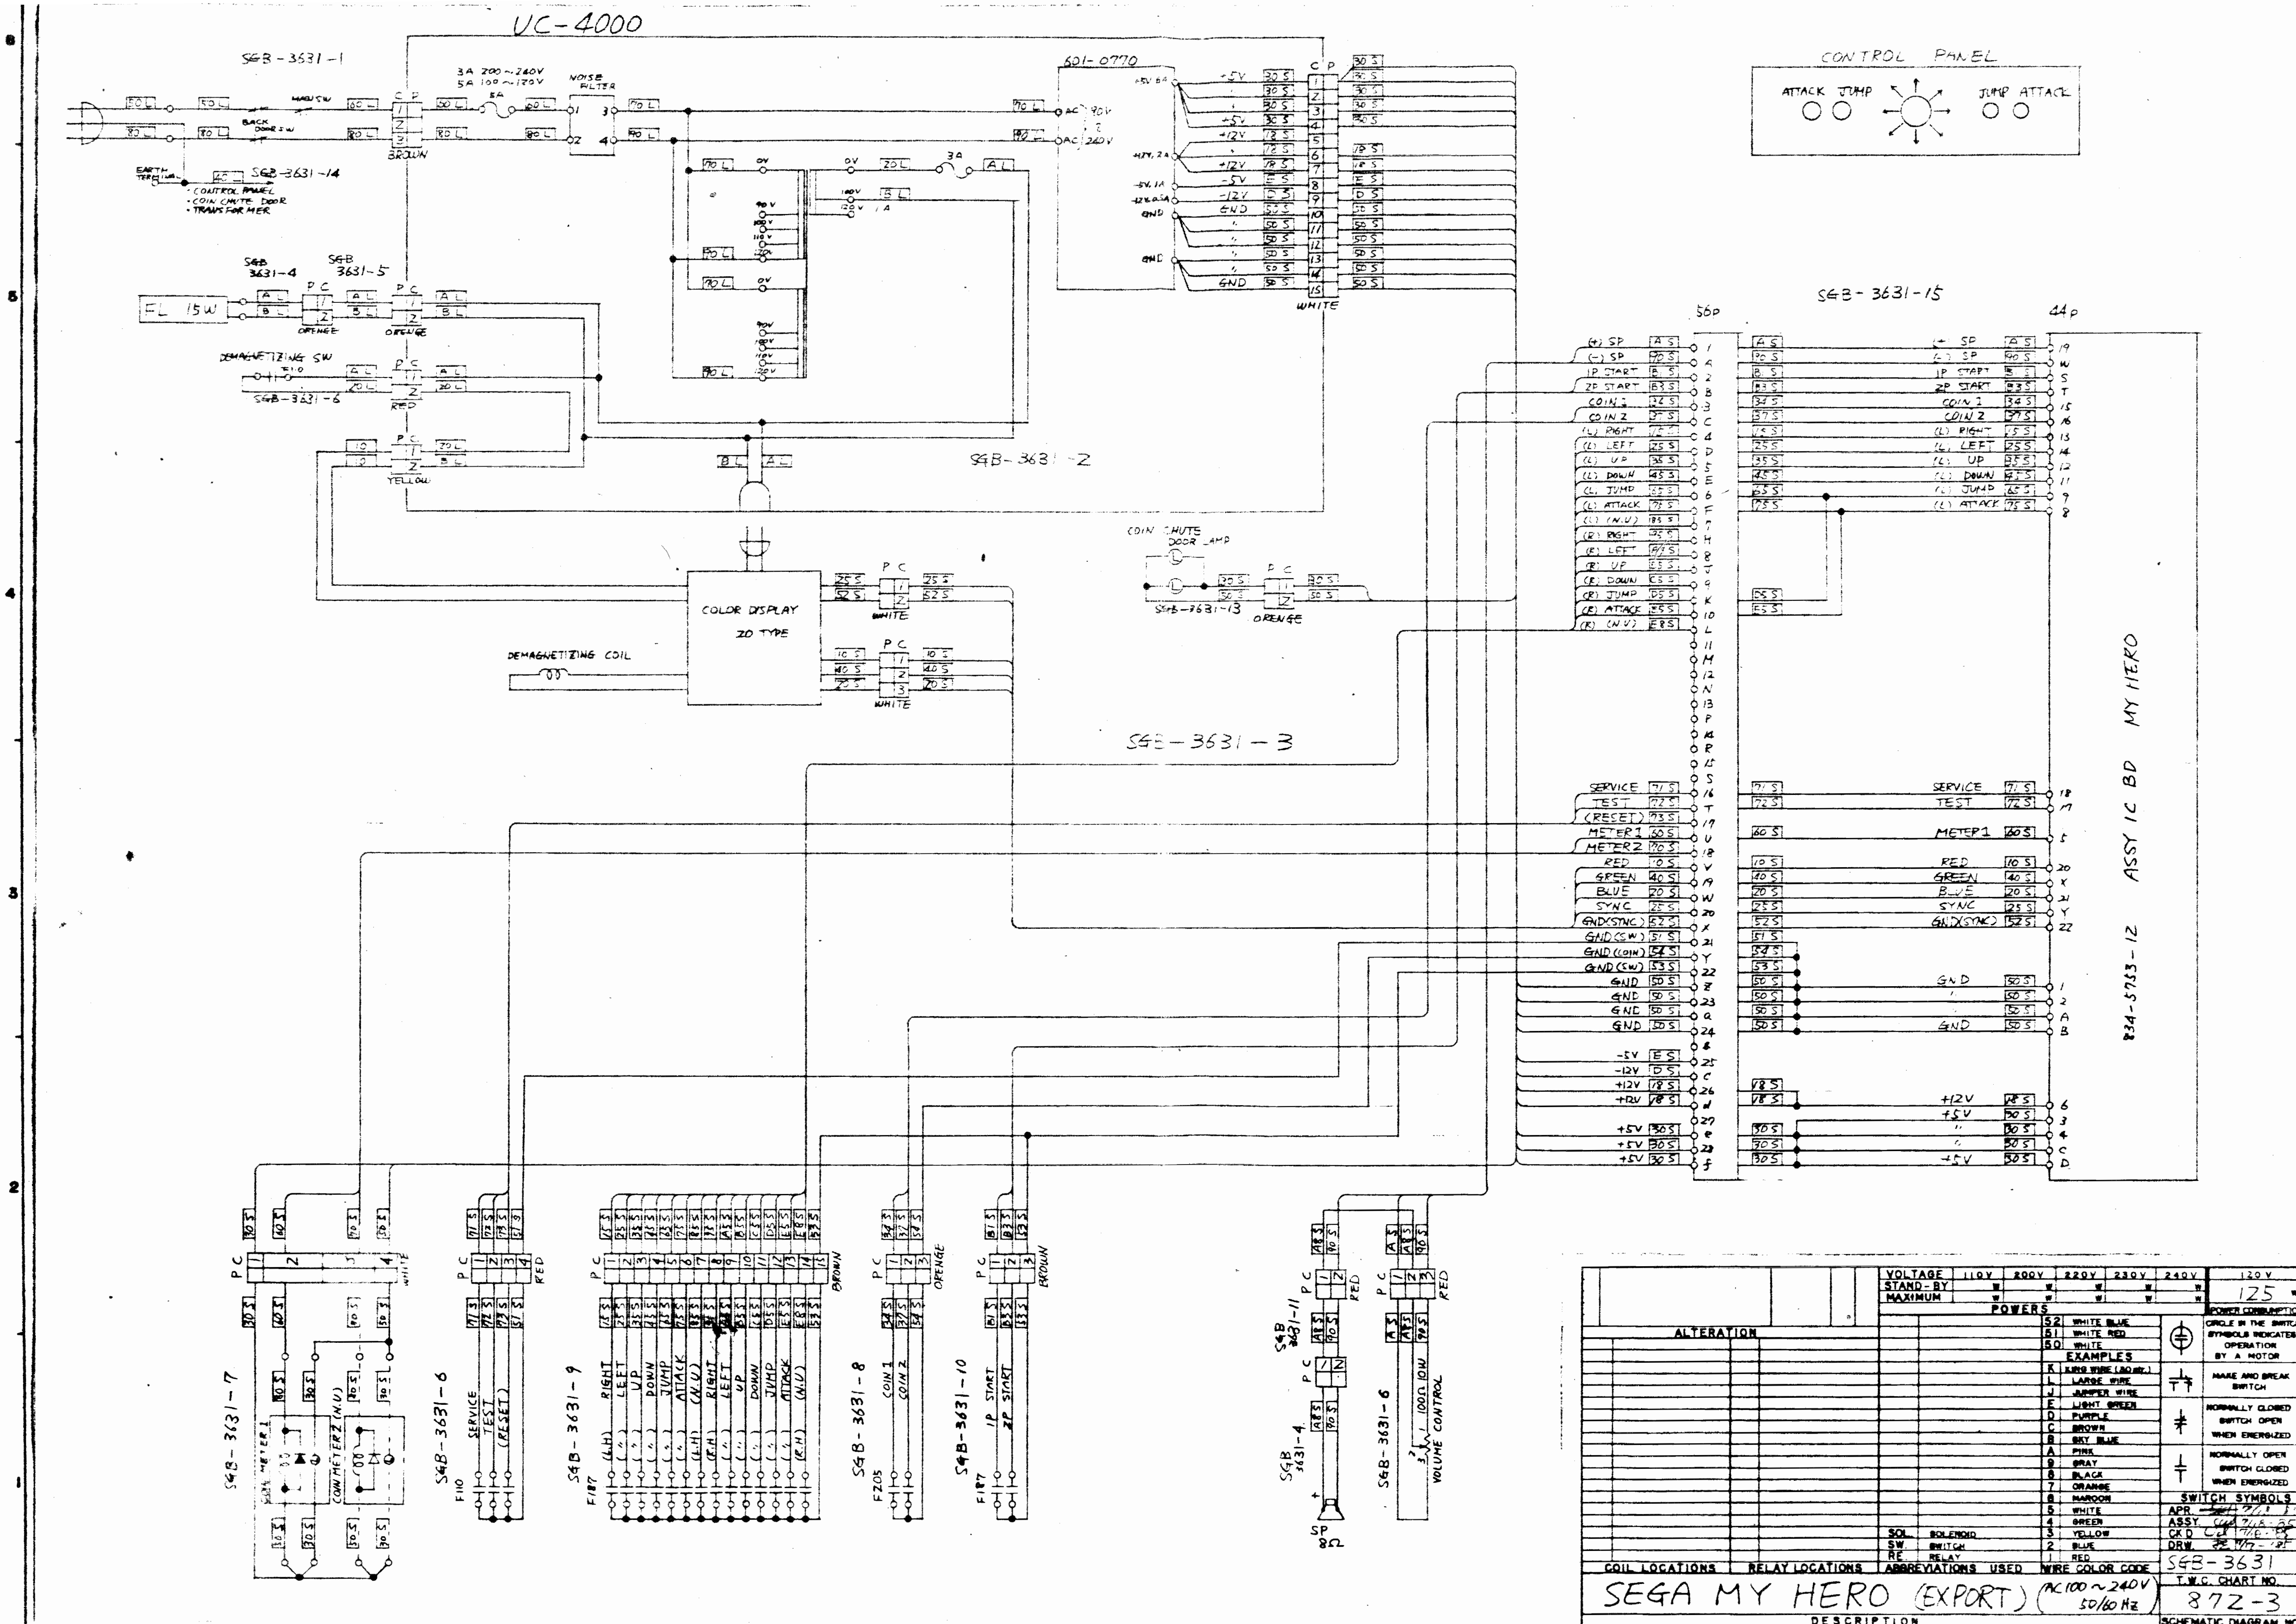
UC-4000
SEGA MY HERO (EXPORT) (AC 100 ~ 240 V 50/60 Hz)
SCHEMATIC DIAGRAM NO. 872-3
SGB-3631
CONTROL PANEL
ATTACK JUMP
JUMP ATTACK
COLOR DISPLAY 20 TYPE
DEMAGNETIZING COIL
DEMAGNETIZING SW
COIN CHUTE DOOR LAMP
SGB-3631-1
SGB-3631-2
SGB-3631-3
SGB-3631-15
601-0770
834-5733-12 ASSY IC BD MY HERO
MY HERO
ALTERATION
COIL LOCATIONS
RELAY LOCATIONS
ABBREVIATIONS USED
WIRE COLOR CODE
SWITCH SYMBOLS
POWERS
EXAMPLES
DESCRIPTION